

HOPE HAVEN





www.allsouthflooring.com



704.690.1871



300 Forsyth Hall Dr, Ste B Charlote, NC 28273



info@allsouthflooring.com

PROJECT OVERVIEW

Location

North Carolina

Architect(s)

End-User Specified

Completion Date

July 2022

Applications

Non-Profit









704.690.1871



HOPE HAVEN



MATERIAL SPECIFICATIONS

Maxxon | Unglued (1)

Unglued was used in this project to remove remnants of the old adhesive that was down before. It provides a quick and easy to use experience for installers.

Maxxon | Isolate (2)

Isolate is a two-part epoxy that was used for this project. It creates a 100% RH barrier to stop moisture emissions and protect the flooring systems that will be installed.

Maxxon | Multi-Use Primer (3)

Multi-Use Primer was rolled out before the Level EZ was installed. In doing this, the primer is able to prime the subfloor and seal all of the previous Maxxon systems, allowing them to perform at their peak. It also reduces porosity which allows proper open time for adhesives.

Maxxon | Level EZ (4)

Level EZ was used for resurfacing in this project. When applied, it was able to create a perfectly even and smooth subfloor with high durability for a long-lasting affect.

Lx Hausys | Glue Down (5)

PrestG Caramel Spectrum was installed. This Glue Down SPC is a 5.0mm and 20miL flooring product.


































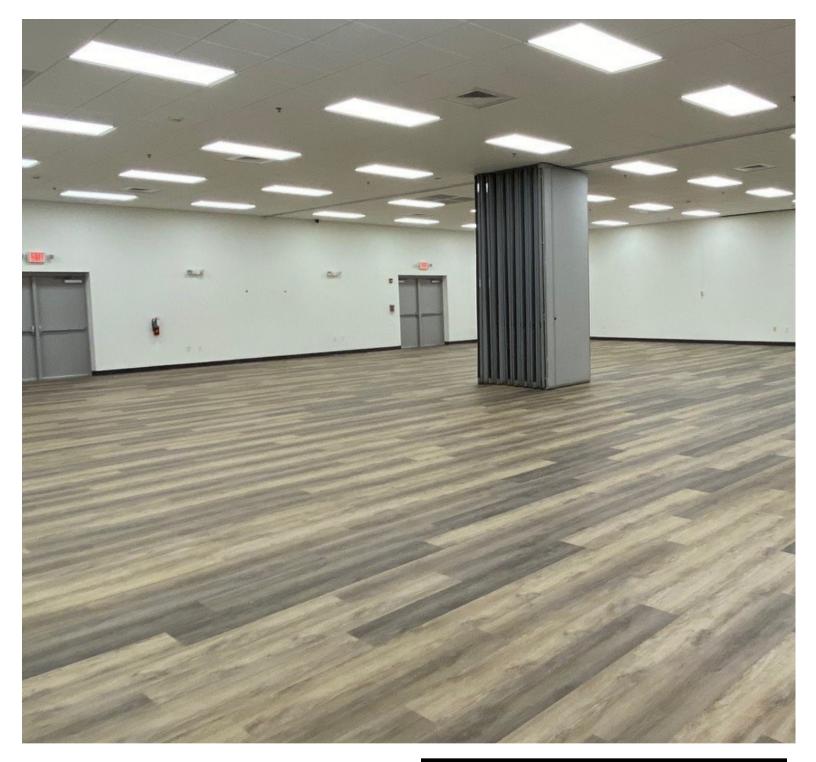

LEARN MORE ABOUT THIS PROJECT!

Photo Credit(s): Kevin Tolbert with Diamond Creek Entertainment, LLC



